


Z-DN

Base Product

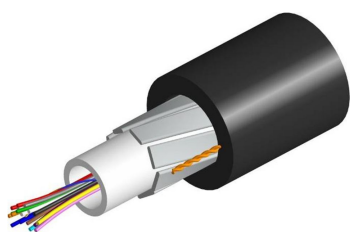

Fiber Optic Cable, Drop, Indoor/Outdoor Zero Halogen, Dual listed, Dielectric

- Fiber drop cables are typically used between the fiber terminal and the building or home and available for various indoor or outdoor applications
- Fiber drop cables are engineered to withstand the most demanding environmental conditions, including sun, heat, cold, moisture and heavy RF interference
- Superior mechanical and optical performance with unmatched stability and quality

Product Classification


Regional Availability	Asia Australia/New Zealand EMEA Latin America North America
Portfolio	CommScope®
Product Type	Fiber drop cable
Product Series	Z-DN

General Specifications

Cable Type	Riser rated low smoke
Construction Type	Non-armored
Subunit Type	Gel-filled
Jacket Color	Black

Ordering Tree

Z-DN

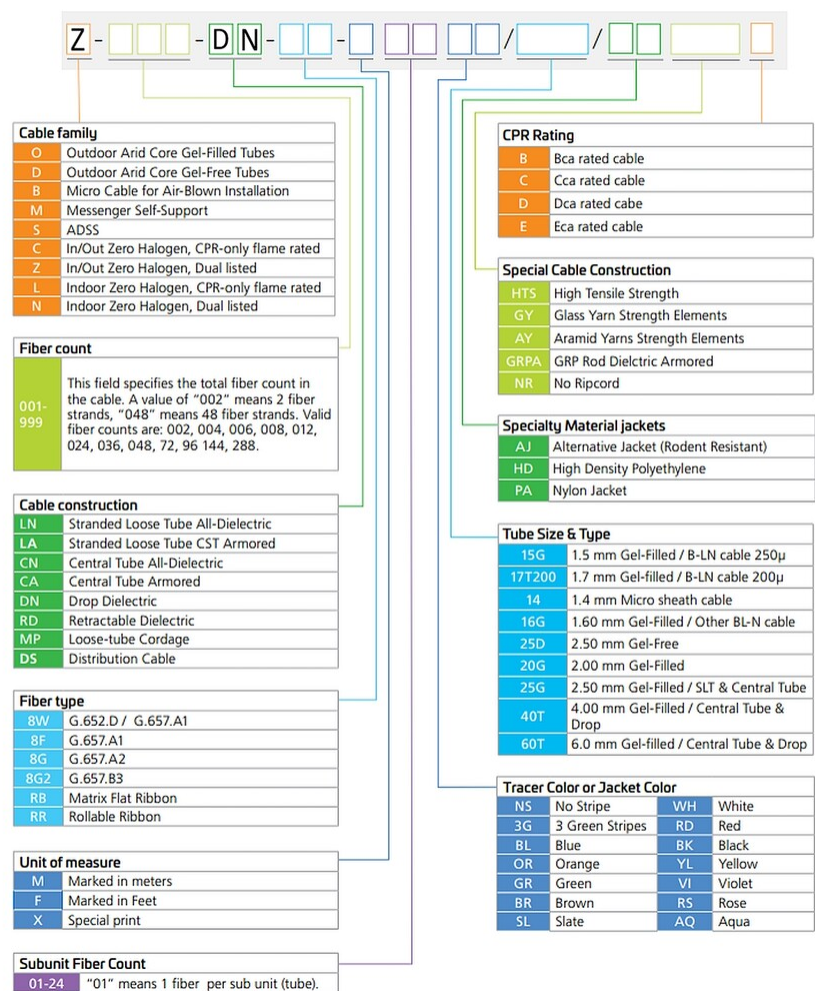

Material Specifications

Jacket Material Low Smoke Zero Halogen (LSZH)

Mechanical Specifications

Strain See long and short term tensile loads

Environmental Specifications

Installation temperature -20 °C to +60 °C (-4 °F to +140 °F)

Operating Temperature -20 °C to +70 °C (-4 °F to +158 °F)

Environmental Space Aerial, lashed | Buried | Low Smoke Zero Halogen (LSZH) | Riser

Jacket UV Resistance UV stabilized

Z-DN

* Footnotes

Operating Temperature Specification applicable to non-terminated bulk fiber cable